

For professionals

For posters, sign boards

For menu cards, price cards


For catalogues, documents

For wider printed materials

Powerful! Full-scale Output!

Advanced models of LPP1051/6509
Laminating width widened* LPP1112
Always an excellent finish guaranteed
Easy operation acquired

The maximum laminating width of 1120mm enables wider lamination. Also good for cold lamination, with the optional Rewinder.

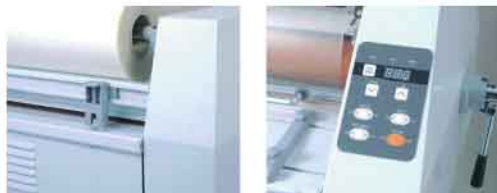

Rear Cutter

Operation Panel



Hot & Cold LAMINATOR

Fuji Lamipacker®

LPP6512 max.width 650mm

Hot & Cold LAMINATOR

Fuji Lamipacker®

LPP1112 max.width 1120mm

Perfect Choice as a Professional Laminator

Perfect Choice as a Professional Laminator

Hot & Cold LAMINATOR

LPP6512 max.width **650mm** A1 size

LPP1112 max.width **1120mm**



Features

- Max. laminating width is 1120mm for LPP1112 and 650mm for LPP6512.
- Our excellent heating system enables consistently first-class lamination.
- Paper core sizes: 2-1/4 inch, 3 inch for LPP1112
1 inch, 2-1/4 inch, 3 inch for LPP6512
- Cold lamination is also possible with the optional Rewinder.
- With combination of temperature control and speed control, almost all kinds of lamination is possible.
- Precise setting is possible with Digital Panel.
- Stand-by mode saves power consumption.
- By using thinner film, such as 32 mic, you can save on running costs.



Specifications

Model	LPP6512	LPP1112
Max. laminating width	650mm(A1)	1120mm
Max. laminating thickness	0.8mm	
Laminating speed	60 - 180cm/min.(adjustable)	
Temperature range	Room temperature, 50 - 130 °C(adjustable)	
Power consumption	2000W	2933W
Power supply	AC 220-240V(50Hz)	
Amperage	8.3A	12.2A
Dimensions	1004(W)x615(D)x412(H)mm	1480(W)x615(D)x412(H)mm
Weight	76.8kg	88.7kg
JAN(EAN)Code	4514015200370	4514015200387
Attachment	Film Setting Board / Stand / Manual / Attachment for 3 inch paper core	
Option	Rewinder	

*Specifications may be modified without prior notice.

Advanced models of LPP6509/1051
Laminating width widened
Easy operation acquired
Always an excellent finish guaranteed

Laminating Film

- It is recommended to use our original roll film. Mismatching of film characteristics may lead to problems such as jamming or imperfect lamination.
- By choosing our lamination film, it is possible to obtain not only waterproof effect but also UV cut or anti-static effect.

Safety Precautions

- Please read instruction manual thoroughly before operation to avoid danger to yourself and failure in the lamination process.
- Should any of the following symptoms occur, unplug the Lamipacker and contact your Fujipla dealer.
 - The power cord or plug gets unusually hot.
 - A strange smell or smoke comes out of the machine.
 - Water or a foreign substance gets inside the machine.
- Warning and caution labels are omitted on the photos in this catalogue.
- Specifications or appearance of the product may change for improvement reasons without notice.
- Parts for maintenance service are available for a minimum of 5 years after cessation of the manufacture of product.

Contact:

ID Card System, Laminating Machine & Film

FUJIPLA Inc.
TOKYO, JAPAN



<http://www.fujipla-japan.com>

The description in the catalogue is the one as of November 2006.